
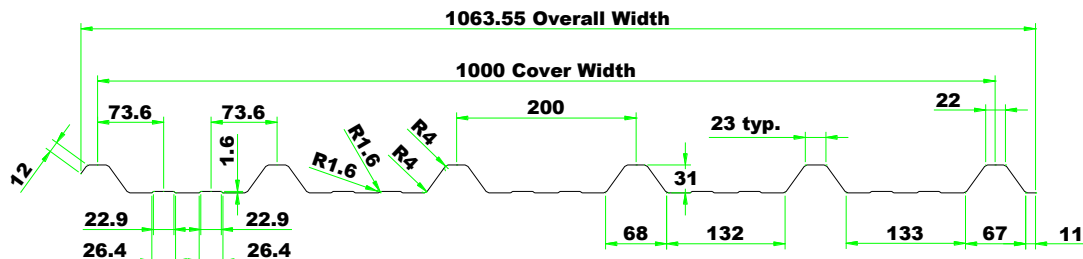


marlon^{cs} LONGLIFE P1933_MW5_1.3mm

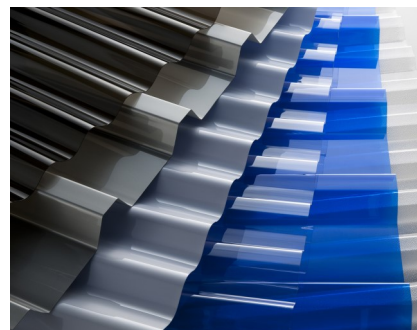


Span/Load Table

Load (N/m ²)	Single Span (m)	End Span (m)	Mid Span (m)
1000	1.04	1.40	1.78
1100	1.01	1.36	1.73
1200	0.98	1.32	1.68
1300	0.96	1.28	1.63
1400	0.93	1.25	1.59
1500	0.91	1.23	1.56
1600	0.89	1.20	1.52
1700	0.87	1.18	1.49
1800	0.86	1.15	1.47
1900	0.84	1.13	1.44
2000	0.83	1.11	1.41

Safe span figures are based on a deflection limit of span/30 plus a safety factor of 1.2. It is assumed that the profile is valley fixed with at least five fixings at all purlins, including metal end laps onto the rooflight.

Load/Span

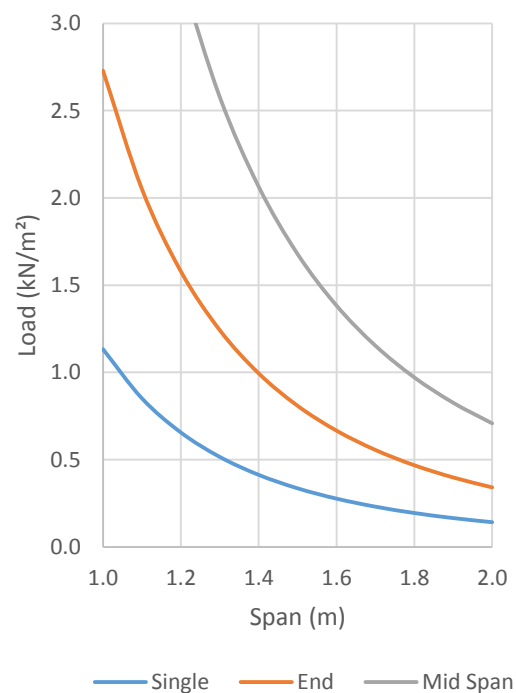

Transmission

Colour	Light	Solar
Clear	88%	85%
Bronze	32%	64%
Opal	46%	55%
Diffusing	73%	74%
Heatguard	7%	30%

Product Characteristics

Tolerances	
Width	1063mm +/- 5 mm
Length	Up to 5 m -0, +10 mm Over 5 m -0, +25 mm
Thickness	1.3mm -0.05, +0.05 mm
Sheet Weight	1.83 Kg/m ²
U Value	5.67 W/m ² K



MARLON CS is the high performance profiled polycarbonate roof sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission and exceptional impact resistance. It is available in a range of standard profiles and thickness, clear and tinted. The sheet has a co-extruded layer on the outer surface of the sheet which forms a barrier resistant to the detrimental effects of UV light, minimising long term yellowing and maintaining mechanical properties.

Warranty

There is 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

Quality

Manufactured under ISO 9001: 2008 to EN 1013: 2012

Handling & Safety

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations

Storage

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage.

Installation

Make adequate allowance for thermal movement. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

Service Temperature

For stable prolonged service ranging from -20°C to 100°C . (Short term unstressed -40°C to 130°C)

Maintenance

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.